


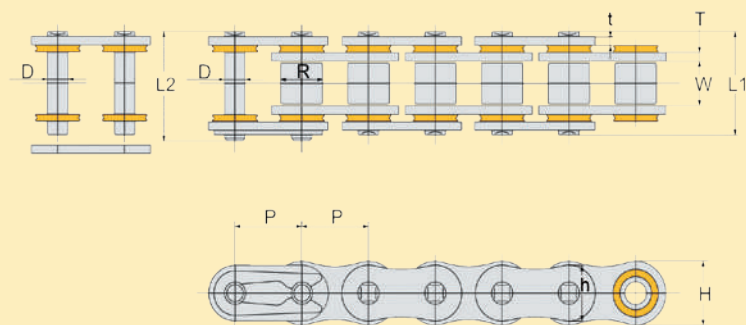

CHAIN REF	CONNECTING LINKS					SEAL RING TYPE	BUSH TYPE	CC	PITCH P mm	WIDTH W mm	ROLLER DIAMETER R mm	PIN DIAMETER D mm	PLATE THICK INT/EXT T/t mm	PLATE HEIGHT INT/EXT H/h mm	L1 max L1 mm	L2 max L2 mm	TENSILE daN	WEIGHT / 100 LINKS kg
	STANDARD BOX	AVAILABLE																
		AR	ARS	MR	MRS													
415F	AR	•		•		NONE	curled	50	12,7	4,88	7,75	4,07	1,8/1,6	9,9/9,0	14,6	15,7	1700	0,64
415GPR-G	AR	•		•		NONE	solid	125-250	12,7	4,88	7,77	3,96	1,5	12/10,4	13,2	14,3	2050	0,70
420M	AR	•		•		NONE	solid	50	12,7	6,35	7,75	3,98	1,5	12/10,4	14,4	15,5	2000	0,72
420R1-G	AR	•		•		NONE	solid	85	12,7	6,35	7,75	3,98	1,8	12/10,4	16,2	17,2	2100	0,88
420MX2-G	AR	•		•		NONE	solid	85-150	12,7	6,35	7,75	3,96	1,8	12/10,4	16,3	17,8	2560	0,88
420MO	ARS		•	•		O-RING	curled	85-125	12,7	6,35	7,75	3,96	1,5	12/10,4	17,0	18,0	1900	0,79
428M	AR	•		•		NONE	solid	125	12,7	7,75	8,51	4,45	1,5	11,7/10,4	16,3	17,3	2000	0,85
428R1-G	AR	•		•		NONE	solid	125-200	12,7	7,75	8,51	4,45	1,8	11,7/10,4	18,4	19,4	2200	1,01
428MX-G	ARS		•	•		NONE	solid	125-200	12,7	7,75	8,51	4,50	1,8	12/10,4	19,0	20,0	2400	1,02
428XMR-G	AR	•		•	•	Xs-RING	solid	125-250	12,7	7,75	8,51	4,45	1,8	11,8	20,1	20,5	2200	1,03
520M	AR	•		•		NONE	solid	125-250	15,88	6,35	10,16	5,08	2,0	15/13	16,6	17,7	3100	1,42
520MR1-G	ARS		•	•		NONE	solid	125-250	15,88	6,35	10,16	5,24	2,0	15/13	18,9	19,8	3400	1,64
520MX4-	ARS		•	•	•	NONE	solid	250-500	15,88	6,35	10,16	5,24	2,0	15/13	16,8	18,8	3740	1,51
520XLR2	ARS		•	•	•	Xs-ring	solid	125-400	15,88	6,35	10,16	5,24	2,0	15/13	19,9	20,7	3300	1,66
520XMR2	ARS		•	•	•	Xs-ring	solid	250-650	15,88	6,35	10,16	5,24	2,4	15/15	21,4	22,3	3700	1,90
520XRR	ARS		•	•	•	Xs-ring	solid	125-650	15,88	6,35	10,16	5,24	2,0	15/13	20,1	21,3	3600	1,58
520XRR2-G	ARS		•	•	•	Xs-ring	solid	125-500	15,88	6,35	10,16	5,24	2,0	15/13	19,8	21	3600	1,58
520XSR-G	MRS		•	•	•	Xs-ring	solid	125-800	15,88	6,35	10,20	5,38	2,0	15/13	20,1	21,2	3630	1,58
520XSM-GG	ARS		•	•	•	Xss-RING	solid	125-650	15,88	6,35	10,16	5,24	2,0	15/13	19,2	20,1	3840	1,66
520XHR-	MRS			•	•	Xs-RING	solid	500-1000	15,88	6,35	10,20	5,38	2,2	15/15	21,2	22,3	4120	1,83
520XHR2-G	MRS			•	•	Xs-RING	solid	500-1000	15,88	6,35	10,20	5,38	2,4/2,2	15/14	20,8	21,9	4180	1,85
520RXX-GG	MR			•	•	Xss-RING	solid	600-1000	15,88	6,35	10,20	5,38	2,0	15/13	20,5	na	3920	1,60
525XMR2	MRS		•	•	•	Xs-RING	solid	250-650	15,88	7,85	10,16	5,24	2,4	15/15	23,3	24,1	3700	1,99
525XRR	MRS		•	•	•	Xs-RING	solid	250-800	15,88	7,85	10,20	5,38	2,2	15/13,5	22,35	23,5	3910	1,82
525XSR2-G	MRS		•	•	•	Xs-RING	solid	500-1000	15,88	7,85	10,20	5,38	2,4/2,2	15/13,5	22,75	23,9	4180	1,9
525XHR2-	MRS			•	•	Xs-RING	solid	600-1000	15,88	7,85	10,20	5,38	2,6/2,4	15/15	23,1	24,2	4415	2,06
525XHR3-G	MRS			•	•	Xs-RING	solid	600-1400	15,88	7,85	10,20	5,38	2,6/2,4	15/14	23,1	na	4890	2,06
530HS	MRS		•	•	•	NONE	solid	250-600	15,88	9,53	10,16	5,08	2,0	15/13	21,6	22,5	3560	1,71
530XMR2	MRS		•	•	•	Xs-RING	solid	250-650	15,88	9,53	10,16	5,24	2,4	15/15	24,7	25,5	3850	2,08
530XRR2	MRS		•	•	•	Xs-RING	solid	250-900	15,88	9,53	10,2	5,38	2,2	15/13,5	24,0	25,2	3910	1,98
530XSR2-G	MRS			•	•	Xs-RING	solid	600-1100	15,88	9,53	10,20	5,38	2,4/2,2	15/13,5	24,4	na	4180	2,05
530XHR-	MRS			•	•	Xs-RING	solid	900-1400	15,88	9,53	10,20	5,38	2,6/2,4	15/15	25,4	na	4710	2,23
530XHR2-G	MRS			•	•	Xs-RING	solid	900-1400	15,88	9,53	10,20	5,38	2,6/2,4	15/14	24,7	na	4890	2,16
532ZVX	MRS			•	•	Xs-RING	solid	600-1100	15,88	9,53	11,10	5,64	2,6/2,4	15/15	25,4	na	4710	2,32
630MO	MRS		•	•	•	O-RING	solid	750-1100	19,05	9,53	11,91	5,95	2,4	17,3/15,3	25,2	na	4510	2,71

Regina

The **O-ring series** chains provide a huge improvement in wear against standard type chains.

CHAIN		Pitch		Inner width		Roller dia.	Plate thickness		Pin length	Weight			Average tensile strength	
							Outer	Inner						
Int. N°	Regina N°	mm	Inch	mm	Inch	mm	mm	mm	mm	Kg/m	Kg/100 Links	Lbs/100 Links	N	Lbs
428	126 ORN	12,70	1/2	7,75	5/16	8,51	1,8	1,8	21,5	0,93	1,18	2,60	22000	4945
520	135 ORC6	15,875	5/8	6,35	1/4	10,23	2,0	2,0	20,4	1,03	1,64	3,60	33000	7417
520	135 ORN6	15,875	5/8	6,35	1/4	10,23	2,0	2,0	20,4	1,03	1,64	3,60	34000	7642
520	135 ORS6	15,875	5/8	6,35	1/4	10,23	2,2	2,2	21,2	1,10	1,74	3,84	35200	7912
525	137 ORS3	15,875	5/8	7,95	5/16	10,23	2,0	2,0	22,1	1,10	1,75	3,86	33800	7597
530	136 ORS2	15,875	5/8	9,53	3/8	10,23	2,2	2,2	24,5	1,23	1,96	4,32	35000	7867
530	136 ORT2	15,875	5/8	9,53	3/8	10,23	2,4	2,4	25,3	1,4	2,22	4,90	41000	9216

ZR chains are the best choice for the most severe and demanding applications. Among other characteristics, the ZR chains feature high alloy steel plates and pins, solid bushings and rollers, shot-peening of plates, pins and rollers, performance-enhancing pre-stretching and "gold" outer plates.

CHAIN		Pitch		Inner width		Roller dia.	Plate thickness		Pin length	Weight			Average tensile strength	
							Outer	Inner						
Int. N°	Regina N°	mm	Inch	mm	Inch	mm	mm	mm	mm	Kg/m	Kg/100 Links	Lbs/100 Links	N	Lbs
520	135 ZRH	15,875	5/8	6,35	1/4	10,23	2,0	2,0	20,6	1,04	1,64	3,65	34800	7822
520	135 ZRD	15,875	5/8	6,35	1/4	10,23	2,2	2,2	21,4	1,11	1,76	3,88	36000	7868
525	137 ZRD	15,875	5/8	7,95	5/16	10,23	2,2	2,2	22,9	1,17	1,86	4,10	35800	7868
525	137 ZRP	15,875	5/8	7,95	5/16	10,23	2,2	2,4	22,3	1,29	2,05	4,53	41000	9217
530	136 ZRT	15,875	5/8	9,53	3/8	10,23	2,4	2,4	25,3	1,40	2,22	4,90	41000	9217
530	136 ZRP	15,875	5/8	9,53	3/8	10,23	2,6	2,4	25,3	1,43	2,28	5,02	41500	9330
532	136.2 ZRP	15,875	5/8	9,53	3/8	11,10	2,6	2,4	25,3	1,50	2,38	5,26	41500	9330

(1) chains with Z-Ring

CHAIN		Pitch		Inner width		Roller dia.	Plate thickness		Pin length	Weight			Average tensile strength	
							Outer	Inner						
Int. N°	Regina N°	mm	Inch	mm	Inch	mm	mm	mm	mm	Kg/m	Kg/100 Links	Lbs/100 Links	N	Lbs
415	90 GP3	12,70	1/2	4,77	3/16	7,75	1,6	1,6	14,8	0,56	0,71	1,57	19500	4383
520	135 GPMV	15,875	5/8	6,35	1/4	10,16	2,0	2,0	18,1	0,85	1,35	2,97	28000	6294
520	135 GPSV	15,875	5/8	6,35	1/4	10,16	2,0	2,0	18,1	0,98	1,56	3,43	34500	7755
520	135 GPXV	15,875	5/8	6,35	1/4	10,16	2,0	2,0	18,1	0,98	1,56	3,43	35000	7867
520	135 GPZN(1)	15,875	5/8	6,35	1/4	10,23	2,0	2,0	20,6	1,04	1,65	3,65	35000	7867
520	135 GPZ(1)	15,875	5/8	6,35	1/4	10,23	2,2	2,2	21,4	1,11	1,76	3,88	36500	8204
530	136 GPZ(1)	15,875	5/8	9,53	3/8	10,23	2,2	2,2	24,5	1,23	1,96	4,32	36500	8204